


- SQUARE & RECTANGULAR
- MEETS SMACNA STANDARDS
- INSULATED
- FOR STEEL OR FIBERGLASS DUCT (OPTION)

**MODELS:**

**08SCL REMOVABLE, PAIRED CAMLOCKS**

**08SH HINGED, WITH CAMLOCK CLOSURE**

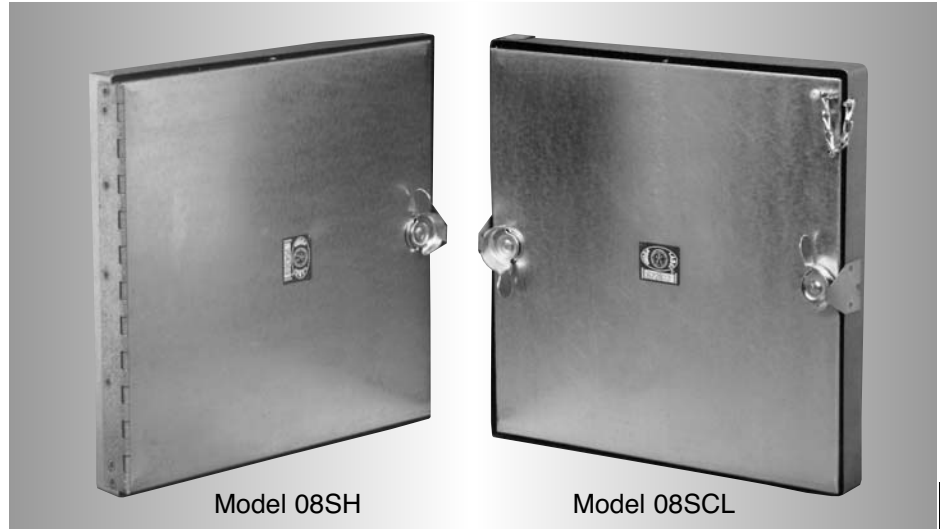

These economical quality access doors meet SMACNA requirements and provide quick, simple installation wherever duct access is required. Available in 20 sizes to meet all access requirements. Camlock operation for positive seal and easy opening.

Meets SMACNA construction specifications for systems up to 2" w.g. (500 Pa)

**CONSTRUCTION DETAILS:**


1. Die-formed 22 ga. (0.85) galvanized steel flanged frame for strength.
2. Die-formed double skin 22 ga. (0.85) galvanized door panel for extra strength.
3. 1" (25) insulation.
4. Notched knock-over tabs.
5. Plated steel camlock fasteners.
6. Positive seal polyethylene gasket.
7. Safety retaining chain standard on removable door Model 08SCL.
8. Continuous piano-type hinge standard on Model 08SH.
9. Removable door Model 08SCL is furnished with four camlocks on sizes over 14" (356) in width or height. Hinged door Model 08SH is furnished with two camlocks on sizes over 14" (356) in height.

**OPTIONS:**


- F10 for 1" (25) fiberglass duct.
  - F15 for 1 1/2" (32) fiberglass duct.
  - HP High Pressure. Adds second gasket on underside of frame for frame to duct seal.
- Manufactured by members of S.M.W.I.A.

**AVAILABLE SIZES (NOMINAL):**

6 x 6 (152 x 152)	16 x 14 (406 x 356)
8 x 8 (203 x 203)	16 x 16 (406 x 406)
10 x 8 (254 x 203)	18 x 12 (457 x 304)
10 x 10 (254 x 254)	18 x 14 (457 x 356)
12 x 10 (305 x 254)	18 x 16 (457 x 406)
12 x 12 (305 x 305)	18 x 18 (457 x 457)
14 x 10 (356 x 254)	20 x 16 (508 x 406)
14 x 12 (356 x 305)	20 x 20 (508 x 508)
14 x 14 (356 x 356)	24 x 18 (610 x 457)
16 x 12 (406 x 305)	24 x 24 (610 x 610)

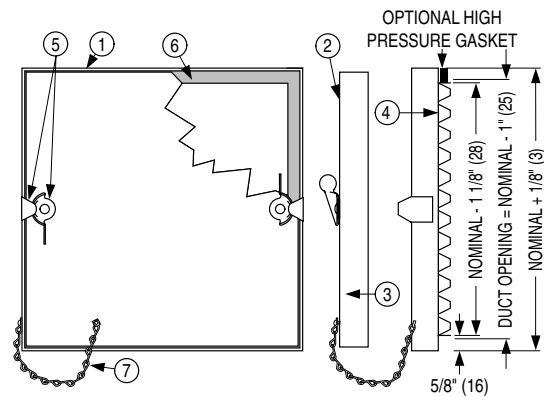


**MODEL 08SCL REMOVABLE DOOR (PAIRED CAMLOCKS)**

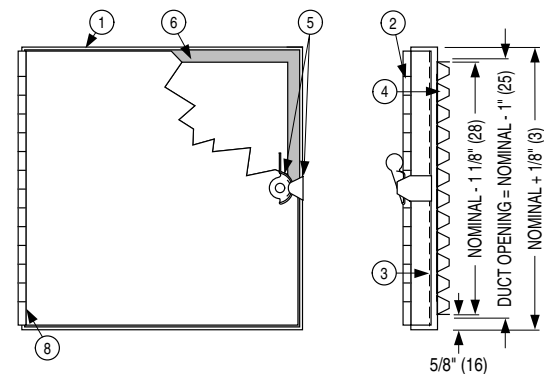

**MODEL 08SH HINGED DOOR (WITH CAMLOCK CLOSURE)**

**FIBERGLASS DUCT OPTION**



**HOW TO SPECIFY OR TO ORDER**

**DUCT ACCESS DOORS**

**MODEL SERIES 08SCL/08SH**

**SUGGESTED SPECIFICATION:**

Provide and install as shown on plans and/or schedules and at each fire damper location, duct access doors of suitable size as indicated. Frame shall be die-formed of 22 ga. (0.86) galvanized steel complete with notched knock-over tabs for installation. Door shall be die-formed of 22 ga. (0.86) galvanized steel and be of double skin construction with 1" (25) of insulation fully enclosed within. A positive seal, polyethylene gasket shall be secured to each door for low leakage. Door shall meet SMACNA requirements for systems up to 2" w.g. (500 Pa) and be (specifier to select) fully removable and secured with double camlocks and safety chain: Nailor Model 08SCL; or hinged on one side with camlock closure: Nailor Model 08SH.

**HOW TO ORDER:**

Order by door size, then list options (if desired).

	<b>OPTION CODE</b>	<b>DESCRIPTION</b>
<b>HIGH PRESSURE GASKETING:</b>	HP	High Pressure Gasket between Frame and Duct
<b>FRAME FOR FIBERGLASS DUCT:</b>	F10	Frame for 1" (25) Fiberglass Duct
	F15	Frame for 1 1/2" (38) Fiberglass Duct