

- UNIVERSAL ACCESS DOOR
- FOR DRYWALL, MASONRY OR PLASTER WALL & CEILINGS

MODEL: 0900-2




Model 0900-2

The Nailor 0900-2 Series is a multi-purpose access door designed to provide convenient access to utilities contained within walls or ceilings. This versatile access door installs flush in drywall, masonry block or tile, and plaster walls and ceilings with a clean unobtrusive finish. The frame features rounded safety corners, a concealed hinge that allows the rigid formed door to close flush, and prepunched mounting holes for easy installation. A slotted screwdriver type catch is standard, with an optional keyed cylinder lock available. White prime coat provides a smooth finish suitable for painting to match building interior. The 0900-2 Series is offered in an array of standard sizes, with special sizes available upon request.

STANDARD SIZES:

NOMINAL SIZE		SHIPPING WEIGHT lbs.
inches	mm	
8 x 8	203 x 203	2.8
10 x 10	254 x 254	3.8
12 x 12	305 x 305	5.0
16 x 16	406 x 406	7.9
18 x 18	457 x 457	9.8
24 x 24	610 x 610	15.9

Wall or ceiling opening = Nominal Size + 3/8" (10).

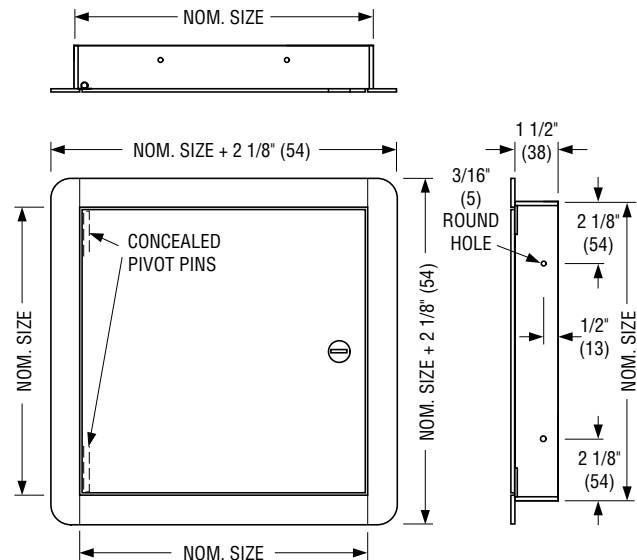


CONSTRUCTION DETAILS:

- Material:** Corrosion-resistant coated steel. 14 gauge (2.0) door and 16 gauge (1.6) frame.
- Door:** Flush to frame. Turned back around edges for extra rigidity.
- Frame:** The frame has pre-punched holes for simple installation.
- Finish:** Primed white finish standard.
- Hinge:** Concealed pivot pins.
- Latch:** Flush mounted screwdriver operated cam is standard.

OPTIONS:

- Type 304 Stainless steel construction. # 4 finish.
- Special size.
- Cylinder lock.

INSTALLATION DETAILS:

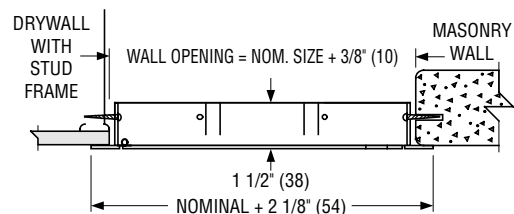

HOW TO SPECIFY OR TO ORDER

MODEL SERIES 0900-1 FIRE RATED ACCESS DOOR

SUGGESTED SPECIFICATION:

Provide and install, as shown on plans and/or schedules, Nailor Industries fire rated access doors of suitable size as indicated. Access doors shall be approved by Underwriters Laboratories for 1 1/2 hours, with 250°F (121°C) max. temperature rise 'B' Label rating in walls. Access doors shall also be approved by Warnock Hersey for 2 hours in ceilings and 3 hours in walls. Frame shall be constructed of 16 ga. (1.6) corrosion resistant steel. Door panel shall be constructed of 20 ga. (1.0) corrosion resistant steel and shall be filled with minimum 2" (51) thick mineral insulation to reduce heat and sound transfer. Door and latch shall be self-closing. Finish shall be prime coat. Standard of acceptance: Nailor Industries Model Series 0900-1.

HOW TO ORDER:

Order by model number and door size, then list options (if desired).

	OPTION CODE	DESCRIPTION
LOCKABLE LATCH:	KC	Cylinder Lock with Key
MATERIAL:	SS	Stainless Steel Construction
SPECIAL SIZE:	–	Specify special door size

MODEL SERIES 0900-2 UNIVERSAL ACCESS DOOR

SUGGESTED SPECIFICATION:

Provide and install, as shown on plans and/or schedules, Nailor Industries universal type access doors of specified size for wall or ceiling mount as indicated. Frame shall be constructed of 16 ga. (1.6) corrosion resistant steel with rounded corners and 3/16" (5) dia. prepunched mounting holes. Door shall be constructed of 16 ga. (1.6) corrosion resistant steel with concealed hinges, and shall close flush with face of frame. Door latch shall be slotted screwdriver operated. Finish shall be prime coat suitable for field painting to match building interior. Standard of acceptance: Nailor Industries Model Series 0900-2.

HOW TO ORDER:

Order by model number and door size, then list options (if desired).

	OPTION CODE	DESCRIPTION
LOCKABLE LATCH:	KC	Cylinder Lock with Key
MATERIAL:	SS	Stainless Steel Construction
SPECIAL SIZE:	–	Specify special door size

At Nailor Industries, we take pride in our flexibility to meet the needs of your specific applications. The options listed above provide a variety of commonly used modifications to satisfy the majority of today's diverse requirements. Should your application require a more unique configuration, please consult your authorized Nailor Representative or the Nailor Industries office nearest you for assistance.